

# UNIQUE SELLING PROPOSITION



Distinctive design & solid appearance



Quiet operating system & easy maintenance



Energy efficient system & environmentally safe refrigerant



Powerful & consistent cooling performance

## HIGHLIGHT & FEATURES

### CREATION : QUALITY ASSURANCE


- ◆ High-quality austenitic stainless steel
- ◆ Adjustable PVC coated steel shelves
- ◆ Solid magnetic gaskets for a tight seal
- ◆ Environment safe HCFC refrigerant
- ◆ Optimum size for space constraint kitchen
- ◆ Complies to global safety standards & regulation

### ENERGY SAVING SYSTEM : ONE-TIME INVESTMENT

- ◆ Effective defrost system
- ◆ Excellent cooling performance that guarantees cost saving with long term usage
- ◆ HI-Low Temperature and Defrost alarm
- ◆ Easy plug-in of 13 Amp power supply (240V/50Hz/1 phase)
- ◆ High density PU for the perfect insulation

### ASSURANCE : HYGIENE AND SAFETY

- ◆ Complies with global sanitary & food grade standards
- ◆ Ensure food freshness and avoid contamination

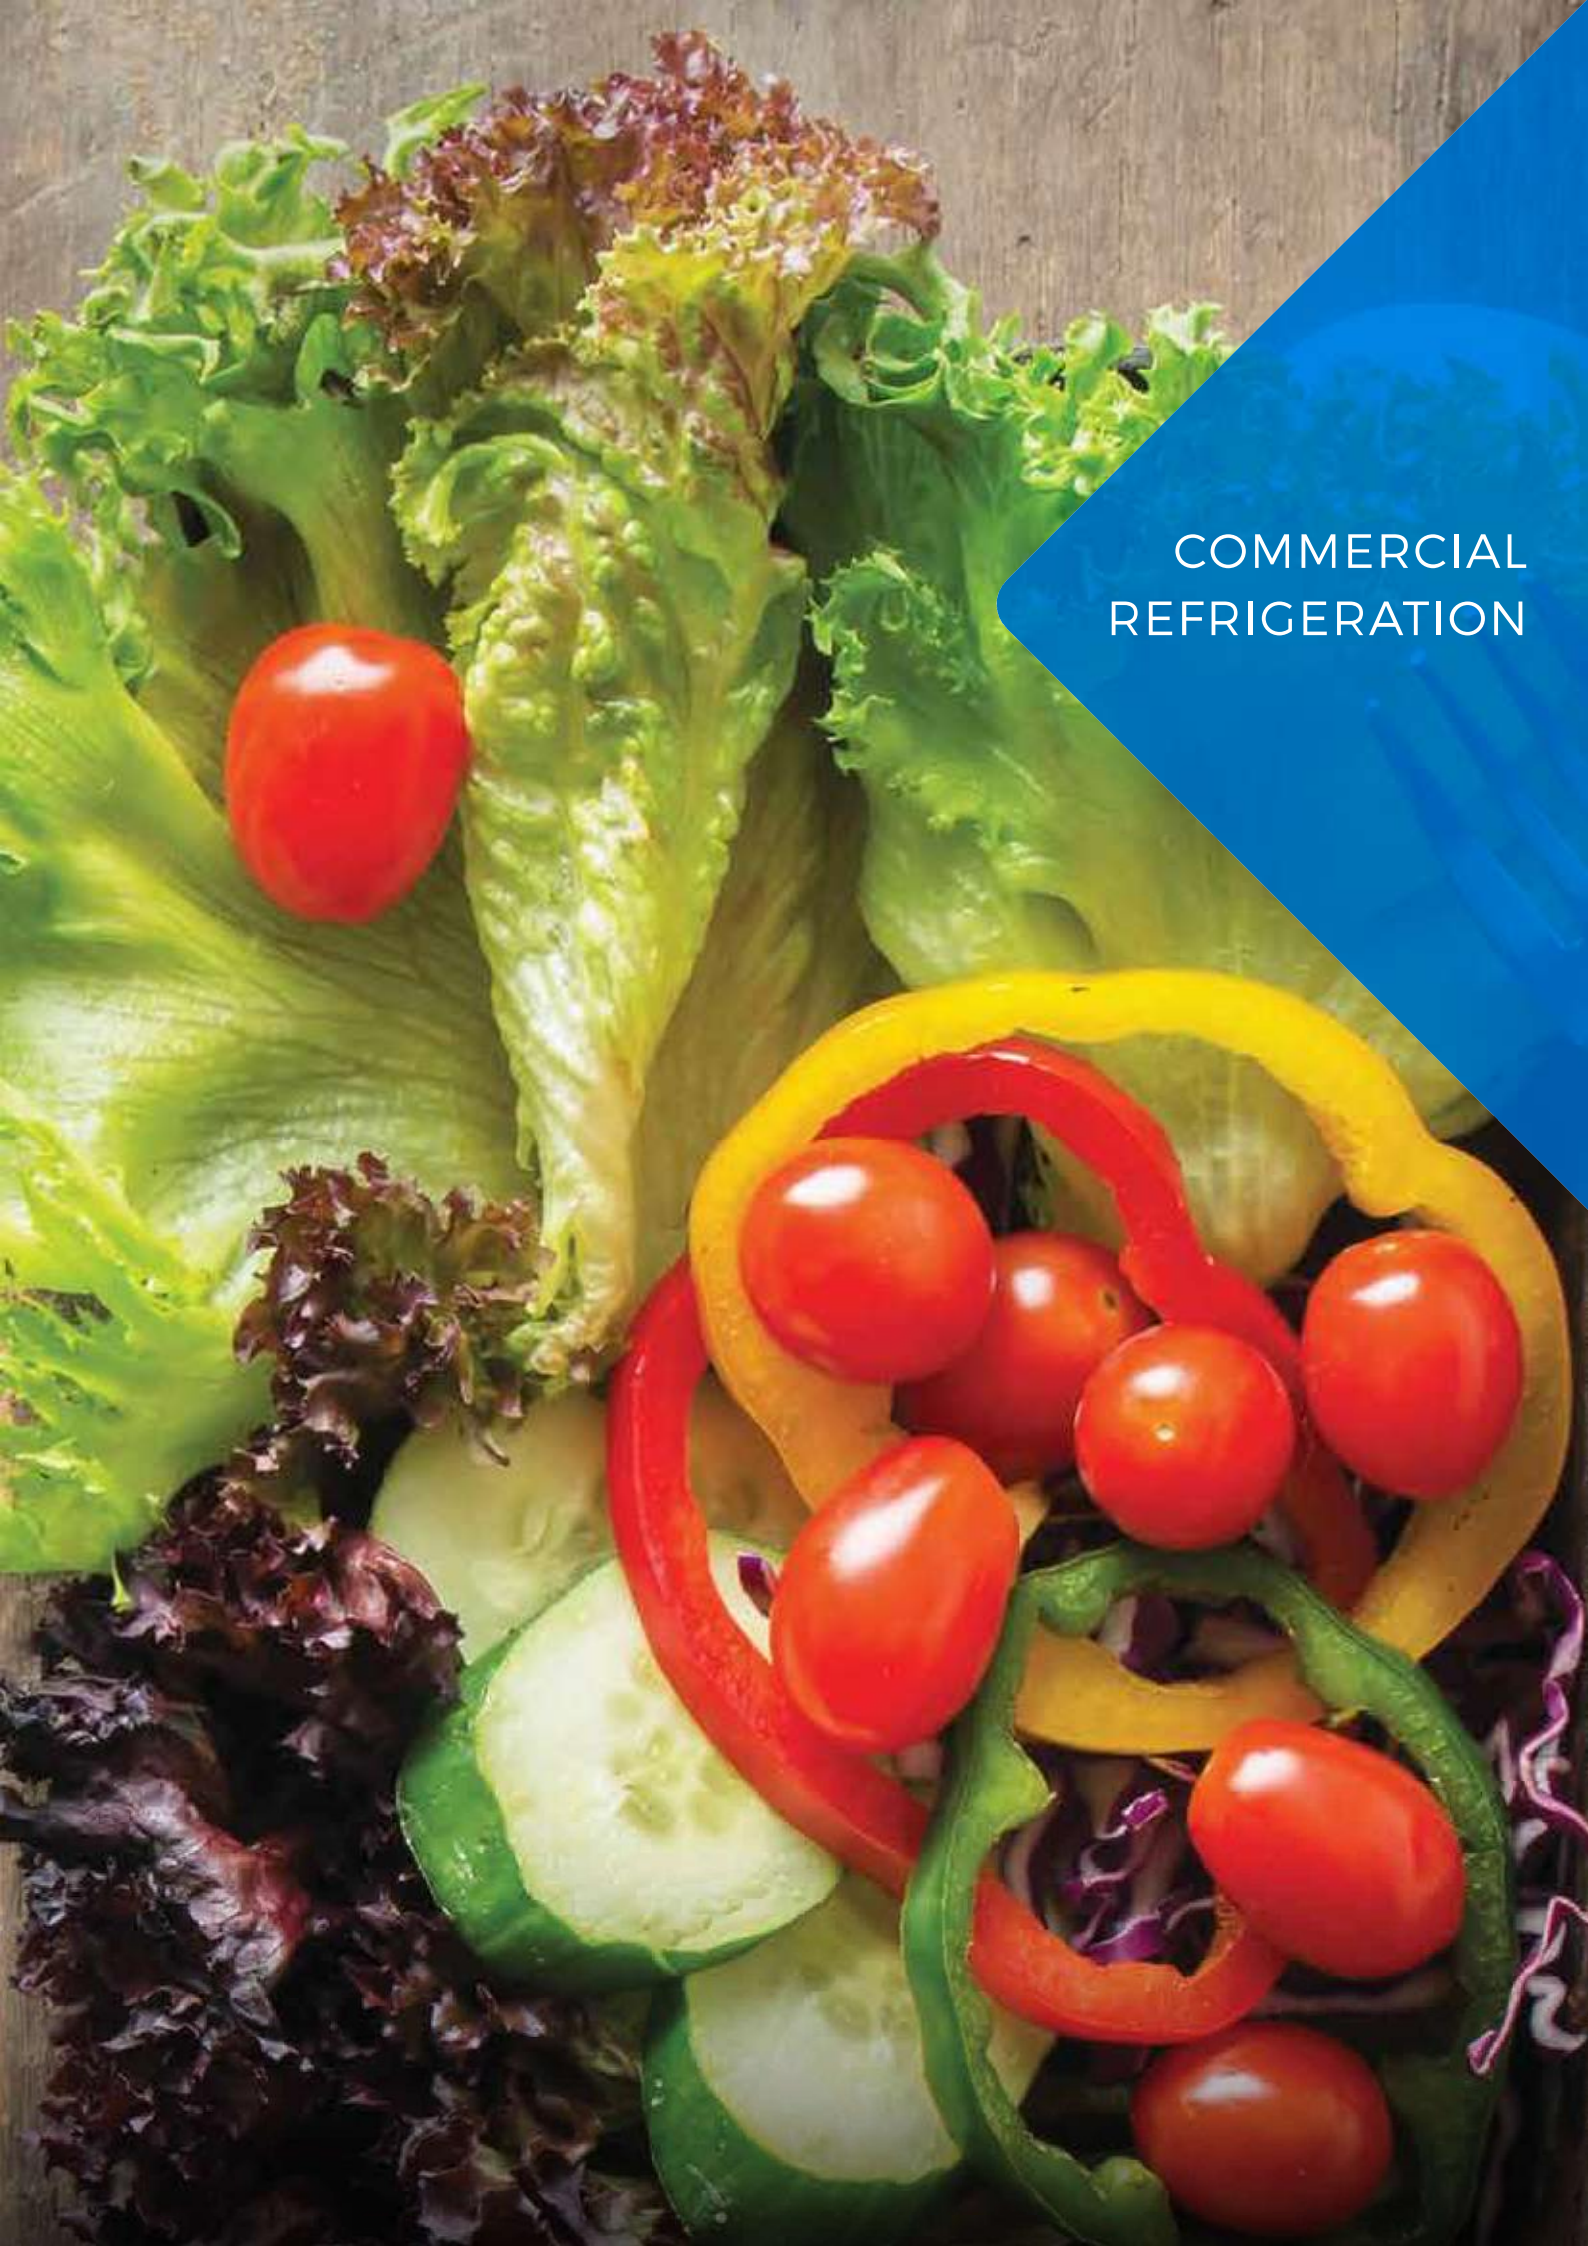

COMMERCIAL  
REFRIGERATION



# REFRIGERATION

## UPRIGHT SOLID DOOR

NEW! Pass Through Upright Refrigerator



1260 x 800 x 1830 width | depth | height (mm)

MLP-1043R	
Weight	180kg
Capacity	1045L
Temp Range	0°C to +7°C
No of Shelves	8
Refrigerant	R-134A
Compressor (hp)	1/3
Voltage	220 - 240V / 50 & 60Hz

## UPRIGHT SOLID DOOR 2-Door



640 x 800 x 1830 width | depth | height (mm)

	MDS-520R1	MDS-520F1
Weight	110kg	110kg
Capacity	508L	508L
Temp Range	0°C to +7°C	-24°C to -3°C
No of Shelves	4	4
Refrigerant	R-134A	R-134A
Compressor (hp)	1/3	1/3
Voltage	220 - 240V / 50 & 60Hz	
Rated input (A/W)	2.1 / 330	1.5 / 240

MDS-520R1

MDS-520F1

**F** FREEZER  
**C** CHILLER

Self Diagnosis

S.Steel Interior/Exterior

Micom Auto.Thermostat

Auto Defrost System



## ◆ UPRIGHT SOLID DOOR 4-Door



MDS-1040R1

**F** FREEZER  
**C** CHILLER

1260 X 800 X 1830 width | depth | height (mm)

	MDS-1040R1	MDS-1040F1	MDS-1040HRF1	MDS-1040RF1
Weight	180kg	180kg	180kg	180kg
Capacity	1045L	1045L	502L(C) + 502L(F)	782L(C) + 222L(F)
Temp Range	0°C to +7°C	-24°C to -3°C	-24°C to -3°C 0°C to +7°C	-24°C to -3°C 0°C to +7°C
No of Shelves	8	8	8	8
Refrigerant	R-134A	R-134A	R-134A	R-134A
Voltage	220 - 240V / 50 & 60Hz			
Rated input (A/W)	1.9 / 300	2.9 / 450	3.5 / 550	3.5 / 550



MDS-1040F1



MDS-1040HRF1



MDS-1040RF1

## ◆ UPRIGHT SOLID DOOR 6-Door



MDS-1660R1

1900 X 800 X 1830 width | depth | height (mm)

	MDS-1660R1	MDS-1660F1	MDS-1660RF1
Weight	240kg	240kg	240kg
Capacity	1644L	1644L	492L(F) + 1107L(C)
Temp Range	0°C to +7°C	-24°C to -3°C	-24°C to -3°C 0°C to +7°C
No of Shelves	12	12	12
Refrigerant	R-134A	R-134A	R-134A
Voltage	220 - 240V / 50 & 60Hz		
Rated input (A/W)	3.8 / 600	4.1 / 640	-



MDS-1660F1



MDS-1660RF1

**F** FREEZER  
**C** CHILLER



Self Diagnosis



S.Steel Interior/Exterior



Micom Auto.Thermostat



Auto Defrost System



# REFRIGERATION

## European Style (Gastronorm)

### 1. Made to fit oven pans.

- Universal pan size (GN 2/1: 650mm x 530mm)
- Easily use the same pans for oven cooking in the refrigerator.



### 2. Made for pan and conventional shelf usage.

- Universal pan size (GN 2/1: 650mm x 530mm)
- Compatible with gastronorm pan and common shelf sizes.



### 3. Adjustable pan guard.

- Place pan on any levels as needed.
- Highly stackable configuration.
- Customizable storage space.





## DELUXE TOP MOUNT SOLID DOOR GN (European Type)



MDRT-771E / MDFT-771E



MDRT-1471E / MDFT-1471E

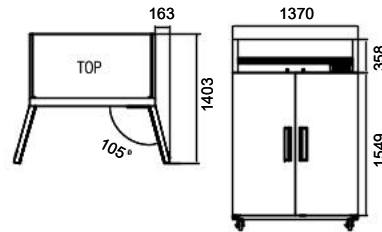

\* 128 mm (5 inch) caster included

Model		MDRT-771E	MDFT-771E	MDRT-1471E	MDFT-1471E
		Refrigerator	❄️ Freezer	Refrigerator	❄️ Freezer
Capacity	liter	620		1270	
	cu. ft.	22		45	
Exterior Dimension (W x D x H)	mm	681 x 787 x 2092*		1370 x 787 x 2092*	
	inch	26.8 x 31 x 82.4*		54 x 31 x 82.4*	
Packing Dimension (W x D x H)	mm	720 x 825 x 2104		1410 x 825 x 2104	
	inch	28.3 x 32.5 x 82.8		55.5 x 32.5 x 82.8	
Net Weight	kg	106	112	158	173
	lb	236	249	351	384
Gross Weight	kg	120	124	176	190
	lb	267	276	391	422
No. of Casters		4		4	
No. of Shelves		4		8	
Door		1 Swing Door		2 Swing Doors	
Pan Guide		6 EA		12 EA	
Pan		3 (2/1 Size)		6 (2/1 Size)	
Compressor (hp)		1/3	1/2	1/3	3/4
Refrigerant		R-134A	R-404A	R-134A	R-404A
Range of Temperature		0~7 °C / 28~39 °F	-24~-3 °C / -9~5 °F	0~7 °C / 28~39 °F	-24~-3 °C / -9~5 °F
Voltage / Frequency		115 V / 60 Hz 220~240 V / 50 & 60 Hz		115 V / 60 Hz 220~240 V / 50 & 60 Hz	
Rated Input (A/W, 220~240V 50Hz)		2.2 / 350	3.5 / 547	2.5 / 391	5.3 / 825
Defrosting		Auto		Auto	
Certification		CE		CE	




## DELUXE TOP MOUNT GLASS DOOR



MDRT-771G / MDFT-771G

MDRT-1471G / MDFT-1471G

MDRT-72TG

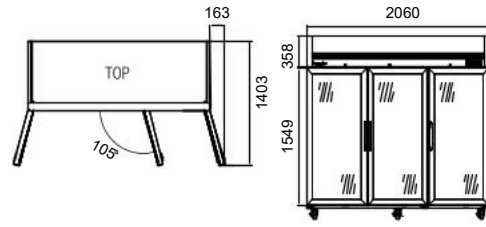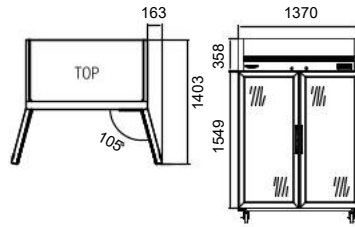

\* 128 mm (5 inch) caster included

Model		MDRT-771G	MDFT-771G	MDRT-1471G	MDFT-1471G	MDRT-1471G
		Refrigerator	❄️ Freezer	Refrigerator	❄️ Freezer	Refrigerator
Capacity	liter	620		1270		1950
	cu. ft.	22		45		69
Exterior Dimension (W x D x H)	mm	681 x 787 x 2092*		1370 x 787 x 2092*		2060 x 787 x 2092*
	inch	26.8 x 31 x 82.4*		54 x 31 x 82.4*		81 x 31 x 82.4*
Packing Dimension (W x D x H)	mm	720 x 865 x 2104		1410 x 865 x 2104		2100 x 865 x 2104
	inch	28.3 x 34 x 82.8		55.5 x 34 x 82.8		82.6 x 34 x 82.8
Net Weight	kg	110	116	166	181	240
	lb	244	258	369	402	533
Gross Weight	kg	124	128	184	198	269
	lb	276	284	409	440	598
No. of Casters		4		4		6
No. of Shelves		4		8		12
Door		1 Swing Door		2 Swing Doors		3 Swing Doors
Compressor (hp)		1/3	1/2	3/4	1	3/4
Refrigerant		R-134A	R-404A	R-404A		R-404A
Range of Temperature		0~7 °C / 28~39 °F	-24~-3 °C / -9~-5 °F	0~7 °C / 28~39 °F	-24~-3 °C / -9~-5 °F	0~7 °C / 28~39 °F
Voltage / Frequency		115 V / 60 Hz 220~240 V / 50 & 60 Hz		115 V / 60 Hz 220~240 V / 50 & 60 Hz		115 V / 60 Hz 220~240 V / 50 & 60 Hz
Rated Input (A/W, 220~240V 50Hz)		4.1 / 650	5.4 / 850	7.4 / 1160	9.5 / 1500	10.2 / 1600
Defrosting		Auto		Auto		Auto
Certification		Safety - UL CE		Safety - UL CE		Safety - UL CE



# ABS LINE UPRIGHT FREEZER

# NEW!



## Features

- ◆ Vacuum molding, can be directly washed with water
- ◆ Non-toxic
- ◆ Light weight
- ◆ Moth-proof & mildew proof
- ◆ Automatic defrost
- ◆ Cool air is evenly distributed
- ◆ ABS white interior

## STAINLESS STEEL

	MSF12VS	MSF30VS
Size (LxDxH)	600 x 600 x 850	600 x 600 x 1860
Net Capacity (L)	98	279
Temperature (C)	-18 to -22	-18 to -22
Refrigerant	R134a	R404a
No of Shelves	2 + 1	4 + 1
Compressor	ZEL	ZEL
Digital Thermostat	Dixell / Carel	Dixell / Carel

## WHITE

	MSF12V	MSF30V
Size (LxDxH)	600 x 600 x 850	600 x 600 x 1860
Net Capacity (L)	98	279
Temperature (C)	-18 to -22	-18 to -22
Refrigerant	R134a	R404a
No of Shelves	2 + 1	4 + 1
Compressor	ZEL	ZEL
Digital Thermostat	Dixell / Carel	Dixell / Carel



# BEVERAGE COOLER

## Features

- ◆ Two vertical LED lights for cabinet + one horizontal canopy LED.
- ◆ Double layer glass with tempered surface.
- ◆ Bottom wire tube and fan-assisted condensing.
- ◆ Adjustable shelves.
- ◆ Black plastic door frame.
- ◆ Vertical interior light.
- ◆ Black PCM exterior and black prepainted aluminium exterior.



MP430WA



MP1000WBH



MP1000WBS


	MP430WA	MP1000WBH	MP1000WBS
Size (LxDxH)	578 x 605 x 1980	1130 x 720 x 2023	1130 x 720 x 2023
Packing Dimension	624 x 630 x 2025	1180 x 770 x 2100	1180 x 770 x 2100
Net Capacity (L)	338	1000	1000
Cooling Systems	Fan Direct Cooling	Fan Cooling	Fan Cooling
Temperature (C)	0 to +10	0 to +10	0 to +10
Coolant	R600a	R290a/R134a	R290a/R134a
Thermostat	Mechanical	Digital	Digital
Shelf	4	8	8
Loading quantity	27/57/75	15/30/30	15/30/30
Door	-	Hinged	Sliding



# CAKE SHOWCASE



	MZS18F-900	MZS18F-1200	MZS18F-1500
Classification	Refrigerator		
Dimension ( W x D x H mm)	900 x 685 x 1220	1200 x 685 x 1220	1200 x 685 x 1220
Temperature ( °C)	2 to 8		
Refrigerant	R134a		
Amps (A)	2.7	3.4	4.2
Number of layer		2	
Compressor (HP)	EMBRACO		
Thermostat	Digital Controller		

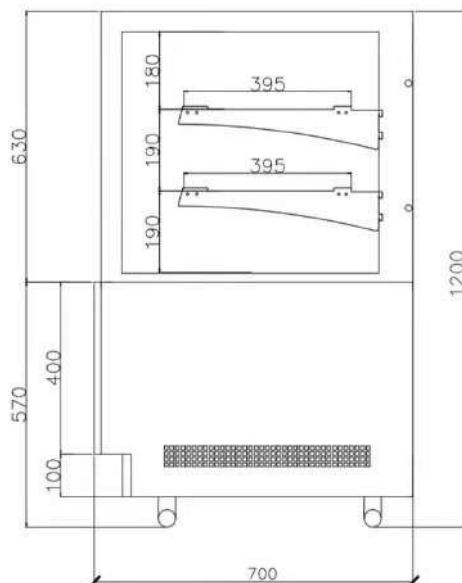

## Features

- ◆ LED lightning 300k for each layer
- ◆ Front insulating glass with heating elements, Temp 28 °C , humidity 75%
- ◆ 4 pcs universal wheels
- ◆ Auto-defrosting
- ◆ Water evaporation pan



Fan cooling



Digital



LED lamp



# REFRIGERATION

## COUNTER REFRIGERATION

CHILLER & FREEZER



Manufactured with high-quality austenitic stainless steel & insulation for an excellent cooling performance that guarantees high cost saving with long term usage.



- ◆ Available in 900mm | 1200mm | 1500mm | 1800mm
- ◆ Depth Option :600mm & 760mm
- ◆ Pizza preparation table, Drawer type, Food pan insert and many more.

### SPECIAL SIZE :



#### Certified For Efficient Standards & Quality

Complies with global sanitary & food safety standards.



#### Convenient Handle Design

Fully open door frame for a firm grip.



#### Micom Automatic Thermostat

Computerized thermometer & temperature controller with a digital display built-in.



#### Easy Maintenance

Easy access to condensing unit for easy maintenance.



#### Adjustable Shelf

PVC Coated Shelf which can withstand up to 50kg of load. Suitable for full GN 1/1 Pan



#### Retractable Door Hinge

Closes door automatically and ensure tight seal.



# COUNTER REFRIGERATION



900 x 600 x 850 ♦ 900 x 760 x 850 width | depth | height (mm)

	MDRT-1D6-900	MDRT-1D7-900
Capacity	138L	190L
Temp Range	2°C to +8°C	
Refrigerant	R-134A	
Voltage	220-240V / 50Hz	

	MDFT-1D6-900	MDFT-1D7-900
Capacity	138L	190L
Temp Range	-20°C to -10°C	
Refrigerant	R-404a	
Voltage	220-240V / 50Hz	



1200 x 600 x 850 ♦ 1200 x 760 x 850 width | depth | height (mm)

	MDRT-2D6-1200	MDRT-2D7-1200
Capacity	216L	298L
Temp Range	2°C to +8°C	
Refrigerant	R-134A	
Voltage	220-240V / 50Hz	

	MDFT-2D6-1200	MDFT-2D7-1200
Capacity	216L	298L
Temp Range	-20°C to -10°C	
Refrigerant	R-404a	
Voltage	220-240V / 50Hz	



1500 x 600 x 850 ♦ 1500 x 760 x 850 width | depth | height (mm)

	MDRT-2D6-1500	MDRT-2D7-1500
Capacity	294L	405L
Temp Range	2°C to +8°C	
Refrigerant	R-134A	
Voltage	220-240V / 50Hz	

	MDFT-2D6-1500	MDFT-2D7-1500
Capacity	294L	405L
Temp Range	-20°C to -10°C	
Refrigerant	R-404a	
Voltage	220-240V / 50Hz	



# REFRIGERATION

## COUNTER REFRIGERATION



1800 x 600 x 850 ♦ 1800 x 760 x 850 width | depth | height (mm)

### MDRT-3D6-1800

Capacity	373L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MDFT-3D6-1800

Capacity	373L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz

### MDRT-3D7-1800

Capacity	513L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MDFT-3D7-1800

Capacity	513L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1800 x 600 x 850 ♦ 1800 x 760 x 850 width | depth | height (mm)

### MDRT-2D6-1800

Capacity	373L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MDFT-2D6-1800

Capacity	373L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz

### MDRT-2D7-1800

Capacity	513L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MDFT-2D7-1800

Capacity	513L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



Self Diagnosis



S.Steel Interior/Exterior



Micom Auto.Thermostat



Auto Defrost System

# ◆ DRAWER COUNTER CHILLER / FREEZER



1200 x 760 x 850 width | depth | height (mm)

### MDRT-4W7-1200

Weight	90kg
Capacity	108L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MDFT-4W7-1200

Weight	90kg
Capacity	108L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1500 x 760 x 850 width | depth | height (mm)

### MDRT-4W7-1500

Weight	105kg
Capacity	132L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MDFT-4W7-1500

Weight	105kg
Capacity	132L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1800 x 760 x 850 width | depth | height (mm)

### MDRT-6W7-1800

Weight	121kg
Capacity	162L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MDFT-6W7-1800

Weight	121kg
Capacity	162L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



# REFRIGERATION

## GLASS DOOR COUNTER CHILLER



900 x 600 x 850 ♦ 900 x 760 x 850 width | depth | height (mm)

### MGRT-1D6-900

Weight	73kg
Capacity	160L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MGRT-1D7-900

Weight	78kg
Capacity	181L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



1200 x 600 x 850 ♦ 1200 x 760 x 850 width | depth | height (mm)

### MGRT-2D6-1200

Weight	85kg
Capacity	270L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MGRT-2D7-1200

Weight	90kg
Capacity	290L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



1500 x 600 x 850 ♦ 1500 x 760 x 850 width | depth | height (mm)

### MGRT-2D6-1500

Weight	100kg
Capacity	379L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MGRT-2D7-1500

Weight	105kg
Capacity	399L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



1800 x 600 x 850 ♦ 1800 x 760 x 850 width | depth | height (mm)

### MGRT-3D6-1800

Weight	116kg
Capacity	488L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MGRT-3D7-1800

Weight	121kg
Capacity	508L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



Self Diagnosis



S.Steel Interior/Exterior



Micom Auto.Thermostat



Auto Defrost System

# SALAD TABLE CHILLER



900 x 600 x 850 ◆ 900 x 760 x 850 width | depth | height (mm)

MDST-1D6-900	
Weight	73kg
Capacity	160L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDST-1D7-900	
Weight	78kg
Capacity	181L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



1200 x 600 x 850 ◆ 1200 x 760 x 850 width | depth | height (mm)

MDST-2D6-1200	
Weight	85kg
Capacity	270L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDST-2D7-1200	
Weight	90kg
Capacity	290L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



1500 x 600 x 850 ◆ 1500 x 760 x 850 width | depth | height (mm)

MDST-2D6-1500	
Weight	100kg
Capacity	379L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDST-2D7-1500	
Weight	105kg
Capacity	399L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



1800 x 600 x 850 ◆ 1800 x 760 x 850 width | depth | height (mm)

MDST-3D6-1800	
Weight	116kg
Capacity	488L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MDST-3D7-1800	
Weight	121kg
Capacity	508L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz



# REFRIGERATION

## PASS-THRU COUNTER CHILLER / FREEZER



1200 x 835 x 850 width | depth | height (mm)

### MPRT-4D7-1200

Weight	90kg
Capacity	290L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MPFT-4D7-1200

Weight	90kg
Capacity	290L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1500 x 835 x 850 width | depth | height (mm)

### MPRT-4D7-1500

Weight	105kg
Capacity	399L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MPFT-4D7-1500

Weight	105kg
Capacity	399L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1800 x 835 x 850 width | depth | height (mm)

### MPRT-6D7-1800

Weight	121kg
Capacity	508L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

### MPFT-6D7-1800

Weight	121kg
Capacity	508L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



# CHEF BASE COUNTER CHILLER / FREEZER



1200 x 760 x 600 width | depth | height (mm)

MBRT-4W7-1200	
Weight	100kg
Capacity	64L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MBFT-4W7-1200	
Weight	101kg
Capacity	64L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1500 x 760 x 600 width | depth | height (mm)

MBRT-4W7-1500	
Weight	114kg
Capacity	80L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MBFT-4W7-1500	
Weight	115kg
Capacity	80L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz



1800 x 760 x 600 width | depth | height (mm)

MBRT-6W7-1800	
Weight	120kg
Capacity	96L
Temp Range	2°C to +8°C
Refrigerant	R-134A
Voltage	220-240V / 50Hz

MBFT-6W7-1800	
Weight	121kg
Capacity	96L
Temp Range	-20°C to -10°C
Refrigerant	R-404a
Voltage	220-240V / 50Hz